

15–30, 40–50 H.P.


Sullivan **Palatek®**

Rotary Screw Air Compressors



Sullivan-Palatek Line Shaft Compressor
Energy Efficient
5 Year Warranty

*Proven performance
with exceptional design.*

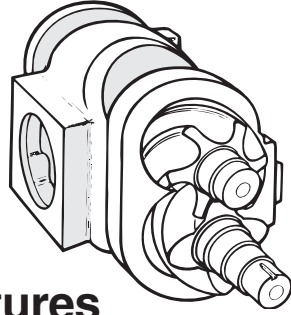

Standard Features 15-30, 40-50 H.P. Air Compressors

COMPRESSOR: Oil flooded rotary screw, continuous duty, industrial air compressor. **Five-year air end warranty.**

PILLOW BLOCK: Mounted and connects direct to compressor shaft, minimizing power loss and miss alignment.

FRAME: Rugged tube steel construction with built in belt tensioning slots.

COUPLING & DRIVE: Compressor is flange mounted to frame for positive alignment and direct driven by low maintenance coupling which carries a **five year warranty.**

AIR INTAKE FILTER: Heavy duty dry type with replaceable element.

SEPARATOR TANK: ASME coded 200 PSIG sump tank, minimum pressure/check valve, relief valve, high efficiency replaceable oil separator element, fluid level sight indicator and vented fill cap.

COOLING SYSTEM: Air cooled with air cooled after-cooler, spin on oil filter and factory filled with Palasyn 45 synthetic, 4,000 hour lubricoolant.

CONTROLS: Full modulation pneumatic control for smooth lowest possible no load power.

INSTRUMENTATION: Air pressure gauge and discharge temperature gauge.

PROTECTIVE DEVICES: High temperature and overpressure relief valve.


MOUNTING: Base mounted. No special foundation required.

GENERAL: Consult factory for options or accessories not listed. Specifications subject to change without notice.



Line Shaft Compressor

SPECIFICATIONS

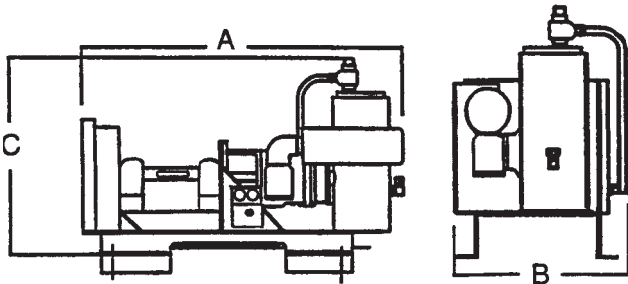

Sold and Serviced By:

BASE MTD	15/30	40/50
A	55"	59"
B	33.5"	40"
C	25"	28.5"
WEIGHT	400 LBS.	500 LBS.

*CRATED DIMENSIONS, L-60", W-45", H-43".

**ADD 100 POUNDS FOR CRATING. ALL DIMENSIONS SHOWN IN INCHES.