

Sullivan --- Palatek®

"The Ultimate Performance Rotary Screw Air Compressor"

- Compact design.
- New rotor profile.
- Reliable power transmission.
- 2-year warranty.
(Air end)



Optional modulation control shown

MODEL 5, 7.5, 10 HP

Unit comes complete with starter, air cooled lube cooler/aftercooler, protective devices for high temperature and motor overload shutdown

Sullivan
Palatek®

3501 West Dunes Highway
Michigan City, IN 46360

TEL: 219-874-2497
TEL: 800-438-6203

FAX: 219-872-5043
FAX: 800-725-6203

<http://www.palatek.com>
E-mail: info@palatek.com

STANDARD FEATURES

COMPRESSOR:

5, 7.5, 10 HP AIR COMPRESSORS.

Lube flooded rotary screw, continuous duty, industrial air compressor.

ELECTRIC MOTOR:

208/230/460/575 volt, 3-phase, open drip motor. Single phase 230 volt 5 & 7.5 HP also available.

MOTOR STARTER:

Full voltage magnetic starter with 110 volt control.

CONTROLS:

Automatic control (dual control) is standard.

INSTRUMENTATION:

Line pressure gauge, lube temperature gauge, hour meter.

COOLING SYSTEM:

Air cooled lube cooler / aftercooler with Palasyn 45, 4000 hour synthetic lubricoolant. Spin on type lube filter and separator for ease of maintenance.

AIR FILTER:

Dry type replaceable.


OPTIONS:

Enclosure, modulation control, moisture separator, separator differential pressure gauge, platform mount and tank mounting. Consult factory for accessories not listed. Specifications subject to change without notice.

GENERAL SPECIFICATIONS

Lube Reservoir Capacity	1 Gal.
Length	30"
Height	26"
Width	26 ¹ / ₄ "
Weight 5 HP	230
Weight 7.5 HP	300
Weight 10 HP	350
Discharge Conn.	³ / ₄ " F.P.T.

Sold and Serviced By:

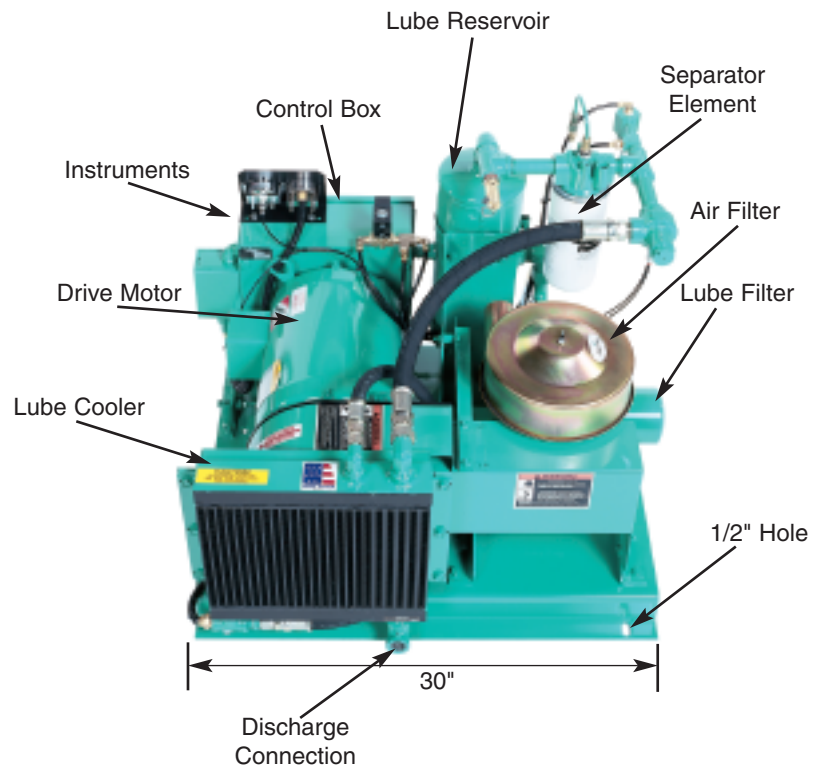

Optional modulation control shown

Sullivan
Palatek